

Fp2 EzSpred Spreader



**Available in Truck Mount,
Trailer or Semi-Trailer**



You'll recognize us by our look.*
You'll remember us for our quality!

* Smooth sided 3 panel look is a registered trademark of FSI Fabrication, LLC.

The Fp2 EzSpred Spreader's modular shell design offers versatility in attachment selection and is designed for commercial operators running 6 to 7 days a week with minimal downtime.

- Ease of use cab control panel.
- Micron filtration in the Oil Reservoir keeps foreign debris out of the system.
- All components that make up the brain of an Fp2 EzSpred are protected from the dirt and acids that can cause a system to fail. All electronic controls are transferred via water proof magnetic plug.
- Babbitt Bearings withstand the harsh environment of dirt and acid. The two-piece design allows for easy replacement if needed.
- Positive Idlers reduce chain wear and damage.
- Floor Chain - two sets of heavy duty 88C floor chain.
- Ez-Adjust Floor Take-Ups adjust the floor chains to the perfect tension every time.
- Removable Headboard.
- Fender Skirting is built into the bed.
- Horizontal Beaters are designed so that they cannot be overloaded.
- Vertical Beaters also utilize automatic overload prevention and are a power house generating 225 Hyd. HP.



Fp2 EzSpred Spreaders


Truck, trailer or semi-trailer.



Ease of use cab control panel.



Hydraulic Control Box - From the control panel in the cab to the control box, the components that make up the brain of an Fp2 EzSpred are protected from the dirt and acids that can cause a system to fail. All electronic controls are transferred via water proof magnetic plug.

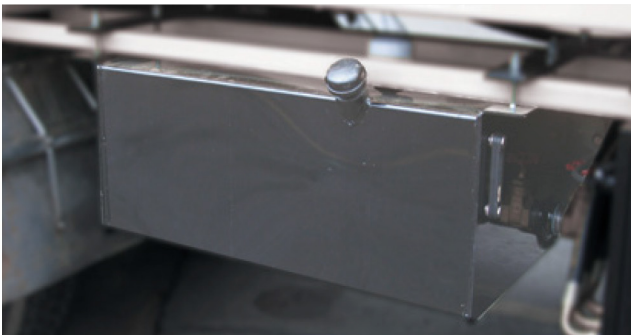

Oil Reservoir with use of micron filtration as well as fine micron filtration for the breather on the reservoir eliminates foreign debris from entering the system.

Ask for a demonstration




ROTO-MIX LLC

2205 East Wyatt Earp Blvd., P.O. Box 1724
Dodge City, Kansas 67801
Fax 620.225.6370 • info@rotomix.com



Call today to connect with a local dealer

620.225.1142

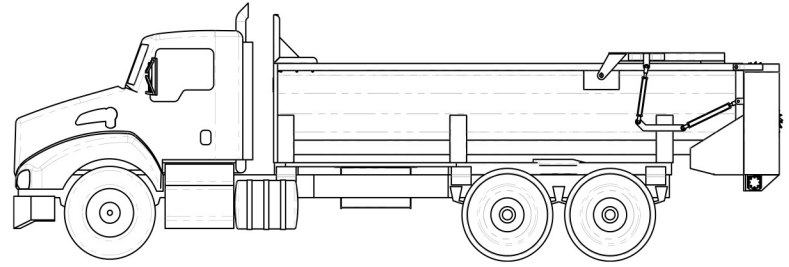

Model	Unit Length	Ft ³ Capacity
Truck Mount		
Fp2-20-TM	20'	580
Fp2-22-TM	22'	640
Fp2-24-TM	24'	697
Trailer		
Fp2-18-TR	18'	523
Fp2-20-TR	20'	580
Fp2-22-TR	22'	640
Fp2-24-TR	24'	697
Fp2-26-TR	26'	755
Fp2-28-TR	28'	812
Fp2-30-TR	30'	870
Semi-Trailer		
Fp2-30-ST	30'	870
Fp2-35-ST	35'	1188
Fp2-40-ST	40'	1583

All dimensions and specifications are approximate and subject to change without notice.



Horizontal Beaters- are designed so that they cannot be overloaded by automatically signaling the floor to stop. When the beaters return to normal operations, the floor is restarted by the system. The 1/2" beater teeth are standard and replacable.



For additional information visit us at

www.rotomix.com